


FEATURES

- SUS304 S.S. cover and anti-slip rubber pad
- Low profile platform with handles and casters
- X2 indicator with multi units and multi functions
- Capacity up to 300kg
- Two platform sizes: 550x550mm, 950x550mm

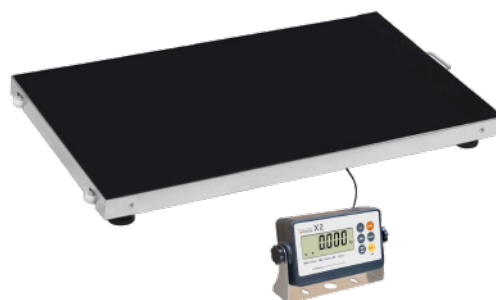

OPTIONAL

Accessories	Part No.
Bluetooth-(With app)	109005
WiFi	109007
Bluetooth	109010
Relay 3 output	109011
RS232	109012

SPECIFICATIONS

Material	100-240V AC 12V DC adaptor 6V1.2Ah Rechargeable Battery
Material	SUS304 S.S. cover
Display	Backlit LCD display (Adjustable backlight level)
Capacity	60/150/300kg
Division	20/50/100g
Units	kg/g/lb/oz
A/D Rate	60 times/second
Load Cell Protection	IP65
Indicator Protection	IP54
Analog Input Signal	-10-15mV
Operating Temperature	0 °C - 40 °C

FUNCTIONS

- Hold
- Counting
- Totalization
- Checkweigh
- Animal weighing

MODELS

Model	Part No.	Capacity	Division
AP5060	650012	60kg	20g
AP5150	650013	150kg	50g
AP9150	650014	150kg	50g
AP9300	650015	300kg	100g

DIMENSION / mm

Model	Size	Pack size	G.W/kg	1PC/CTN
AP5060	550*550*50	615*635*90	15.5	1
AP5150	550*550*50	615*635*90	15.5	1
AP9150	550*950*50	565*985*90	19.5	1
AP9300	550*950*50	565*985*90	19.5	1

