

BWS Waterproof Platform Scales

General Specifications

- Display 52mm digit LCD display, with white LED backlight
- Capacities 15kg~300kg
- Keyboard 7 keys (Mechanical switch)
- Housing Stainless steel
- Load cell excitation voltage 5V/150mA
- Max. Divisions 3,000e; 2 x 3,000e; 6,000d
- ADC update 1/10 second
- Operating Temp. -10°C~+40°C
- Power AC adapter (12V/500mA), rechargeable battery (6V/4Ah)
- Packing Master carton packing:
BWS-3236, dimension 0.077m³
BWS-4050, dimension 0.14m³




- IP65 waterproof rating
- BWS-3236 (hockey stick pole); BWS-4050, BWS-6060 (straight pole)
- Applications: 1. Check weighing 2. Accumulation 3. Animal weighing
4. Weight hold function (non OIML version only)
- OIML approval from DELTA (approval no.DK0199.165)
- Stainless steel housing and load cell
- Optional RS-232 interface to connect to computer, LP-50 label printer or TPuP mini printer
- Optional analogue output (4V~20mA/0~10V)
- Optional bluetooth
- Optional initial-verification



BWS Waterproof Platform Scales

Model Name	Platform Size	Capacity	Readability	Division	Approx. Weight	Approval
BWS-3236-15K	320mm x 360mm	15kg	2g	6,000d	15kg	CE
BWS-3236-30K	320mm x 360mm	30kg	5g	6,000d	15kg	CE
BWS-3236-60K	320mm x 360mm	60kg	10g	6,000d	15kg	CE
BWS-4050-30K	400mm x 500mm	30kg	5g	6,000d	21kg	CE
BWS-4050-60K	400mm x 500mm	60kg	10g	6,000d	21kg	CE
BWS-4050-150K	400mm x 500mm	150kg	20g	6,000d	21kg	CE
BWS-6060-60K	600mm x 600mm	60kg	10g	6,000d	27kg	CE
BWS-6060-150K	600mm x 600mm	150kg	20g	6,000d	27kg	CE
BWS-6060-300K	600mm x 600mm	300kg	50g	6,000d	27kg	CE
BWS-3024-6K-MR	300mm x 240mm	6kg/3kg	2g/1g	2 x 3,000e	9kg	CE, OIML
BWS-3236-15K-MR	320mm x 360mm	15kg/6kg	5g/2g	2 x 3,000e	15kg	CE, OIML
BWS-3236-30K-MR	320mm x 360mm	30kg/15kg	10g/5g	2 x 3,000e	15kg	CE, OIML
BWS-3236-60K-MR	320mm x 360mm	60kg/30kg	20g/10g	2 x 3,000e	15kg	CE, OIML
BWS-4050-60K-MR	400mm x 500mm	60kg/30kg	20g/10g	2 x 3,000e	21kg	CE, OIML
BWS-4050-150K-MR	400mm x 500mm	150kg/60kg	50g/20g	2 x 3,000e	21kg	CE, OIML
BWS-3236-15K-M	320mm x 360mm	15kg	5g	3,000e	15kg	CE, OIML
BWS-3236-30K-M	320mm x 360mm	30kg	10g	3,000e	15kg	CE, OIML
BWS-3236-60K-M	320mm x 360mm	60kg	20g	3,000e	15kg	CE, OIML
BWS-4050-30K-M	400mm x 500mm	30kg	10g	3,000e	21kg	CE, OIML
BWS-4050-60K-M	400mm x 500mm	60kg	20g	3,000e	21kg	CE, OIML
BWS-4050-150K-M	400mm x 500mm	150kg	50g	3,000e	21kg	CE, OIML
BWS-6060-60K-M	600mm x 600mm	60kg	20g	3,000e	27kg	CE, OIML
BWS-6060-150K-M	600mm x 600mm	150kg	50g	3,000e	27kg	CE, OIML
BWS-6060-300K-M	600mm x 600mm	300kg	100g	3,000e	27kg	CE, OIML

Options

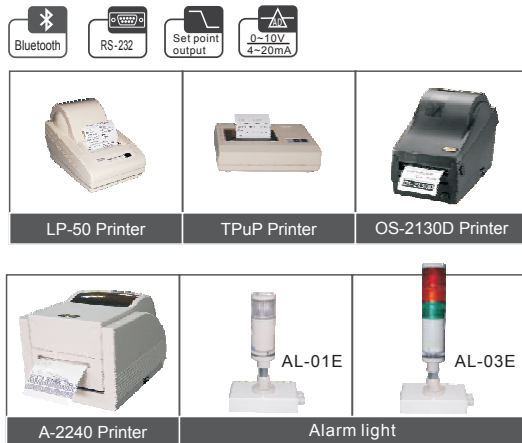


Print formats


NO.: 1 GS: 4.240KG	DATE: 2012/03/07 TIME: 19:10:54 TOTAL ***** NO: 3 Total: 12.705KG
DATE: 2012/03/07 TIME: 19:06:37 NO.: 1 GS: 4.235KG	DATE: 2012/03/07 TIME: 19:09:03 NO.: 1 GS: 4.235KG TOTAL: 4.235KG
DATE: 2012/03/07 TIME: 19:08:26 NO.: 2 NT: 4.235KG TW: 1.810KG GW: 6.045KG	DATE: 2012/03/07 TIME: 19:10:48 NO.: 3 NT: 4.235KG TW: 1.810KG GW: 6.045KG TOTAL: 12.705KG

Dimensions(mm)

	BWS-3236	BWS-4050	BWS-6060	BWS-6080
A	400	400	400	400
B	320	400	600	600
C	360	500	600	800

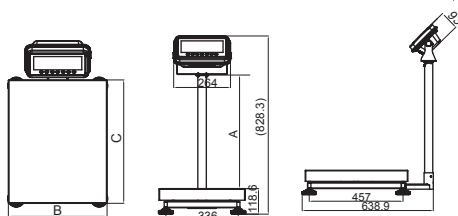

BWS-4050, BWS-6060

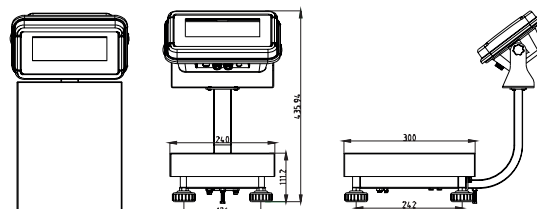

BWS-3236, BWS-3024